



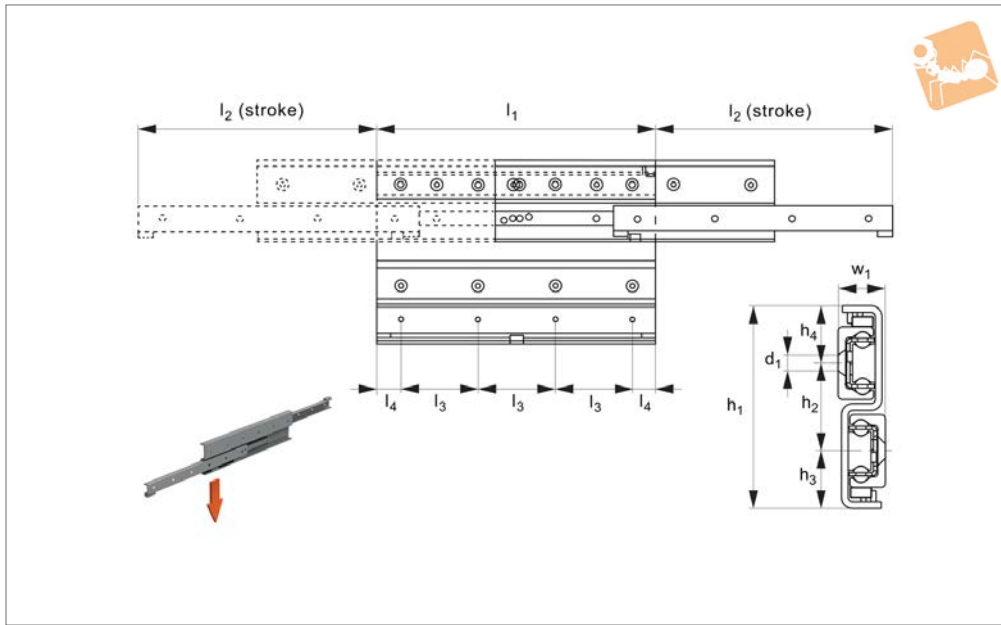

Fully Telescopic Slides, size 28

double direction stroke

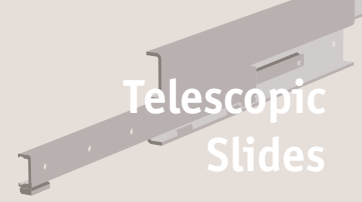

L1984.28D

TELESCOPIC SLIDES

Material

Cold drawn bearing steel raceways hardened to 60 HRC. Balls - hardened steel. Zinc coating to ISO2081 (excluding raceways). Corrosion resistant coatings available on request.

Technical Notes

These are extremely strong and rigid telescopic slides with high load capacities. C_{0rad} is the load rating for a single telescopic

slide. They have very low deflection characteristics. Temperature range: -30°C to +110°C. This is the double direction stroke version - the moving member can extend out of both sides of the slide. Moving rail must be lower rail (unless technical department consulted).

Tips

When closing a D version slide, the return of the intermediate member is not auto-

matic. When the moving element has started the stroke in the opposite direction it will catch the intermediate member and force it to return. The slides have end stops, but these are not designed to stop a moving, loaded slide. External end stops should be used for this. Only to be used for horizontal movements.

Order No.	h_1	h_2	h_3	h_4	l_1	l_2	l_3	l_4	w_1	For screws d_1	No. of holes	Load (per rail) C_{0rad} N max.	Weight kg
L1984.28D-0290	84	35	24.5	24.5	290	246	80	25	17	M5	4	895	1.9
L1984.28D-0370	84	35	24.5	24.5	370	326	80	25	17	M5	5	1105	2.4
L1984.28D-0450	84	35	24.5	24.5	450	406	80	25	17	M5	6	1317	2.9
L1984.28D-0530	84	35	24.5	24.5	530	486	80	25	17	M5	7	1626	3.4
L1984.28D-0610	84	35	24.5	24.5	610	566	80	25	17	M5	8	1837	3.9
L1984.28D-0690	84	35	24.5	24.5	690	646	80	25	17	M5	9	2050	4.4
L1984.28D-0770	84	35	24.5	24.5	770	726	80	25	17	M5	10	2262	4.9
L1984.28D-0850	84	35	24.5	24.5	850	806	80	25	17	M5	11	2475	5.4
L1984.28D-0930	84	35	24.5	24.5	930	886	80	25	17	M5	12	2581	5.6
L1984.28D-1010	84	35	24.5	24.5	1010	966	80	25	17	M5	13	2357	6.4
L1984.28D-1090	84	35	24.5	24.5	1090	1046	80	25	17	M5	14	2168	7.0
L1984.28D-1170	84	35	24.5	24.5	1170	1126	80	25	17	M5	15	2008	7.4
L1984.28D-1250	84	35	24.5	24.5	1250	1206	80	25	17	M5	16	1870	8.0
L1984.28D-1330	84	35	24.5	24.5	1330	1286	80	25	17	M5	17	1749	8.5
L1984.28D-1410	84	35	24.5	24.5	1410	1366	80	25	17	M5	18	1644	9.0
L1984.28D-1490	84	35	24.5	24.5	1490	1446	80	25	17	M5	19	1550	9.5