





# Fully Telescopic Slides, size 35

double direction stroke

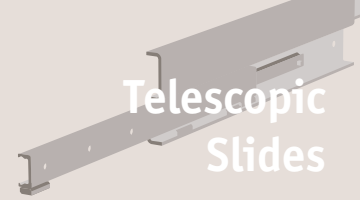

Telescopic Slides

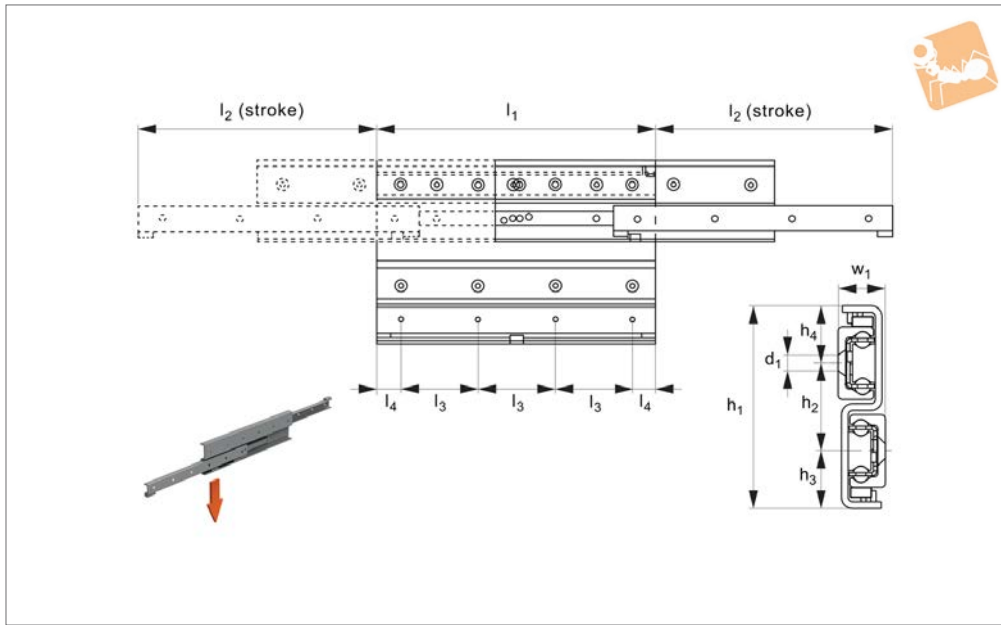

**L1984.35D**

TELESCOPIC SLIDES

### Material

Cold drawn bearing steel raceways hardened to 60 HRC. Balls - hardened steel.  
Zinc coating to ISO2081 (excluding raceways). Corrosion resistant coatings available on request.

### Technical Notes

These are extremely strong and rigid telescopic slides with high load capacities.  $C_{0rad}$  is the load rating for a single telescopic

slide. They have very low deflection characteristics.  
Temperature range:  $-30^{\circ}\text{C}$  to  $+110^{\circ}\text{C}$ .  
This is the double direction stroke version - the moving member can extend out of both sides of the slide.  
Moving rail must be lower rail (unless technical department consulted).

### Tips

When closing a D version slide, the return of the intermediate member is not auto-

matic. When the moving element has started the stroke in the opposite direction it will catch the intermediate member and force it to return.  
The slides have end stops, but these are not designed to stop a moving, loaded slide. External end stops should be used for this.  
Only to be used for horizontal movements.

Order No.	$h_1$	$h_2$	$h_3$	$h_4$	$l_1$	$l_2$	$l_3$	$l_4$	$w_1$	For screws $d_1$	No. of holes	Load (per rail) $C_{0rad}$ N max.	Weight kg
L1984.35D-0450	104	43	30.5	30.5	450	350	80	25	22.5	M6	6	1500	4.5
L1984.35D-0530	104	43	30.5	30.5	530	430	80	25	22.5	M6	7	2022	5.4
L1984.35D-0610	104	43	30.5	30.5	610	510	80	25	22.5	M6	8	2290	6.2
L1984.35D-0690	104	43	30.5	30.5	690	590	80	25	22.5	M6	9	2558	9.9
L1984.35D-0770	104	43	30.5	30.5	770	670	80	25	22.5	M6	10	3095	7.7
L1984.35D-0850	104	43	30.5	30.5	850	750	80	25	22.5	M6	11	3361	8.9
L1984.35D-0930	104	43	30.5	30.5	930	830	80	25	22.5	M6	12	3629	9.4
L1984.35D-1010	104	43	30.5	30.5	1010	910	80	25	22.5	M6	13	4171	10.2
L1984.35D-1090	104	43	30.5	30.5	1090	990	80	25	22.5	M6	14	3859	11.0
L1984.35D-1170	104	43	30.5	30.5	1170	1070	80	25	22.5	M6	15	3564	11.8
L1984.35D-1250	104	43	30.5	30.5	1250	1150	80	25	22.5	M6	16	3433	12.6
L1984.35D-1330	104	43	30.5	30.5	1330	1230	80	25	22.5	M6	17	3198	13.4
L1984.35D-1410	104	43	30.5	30.5	1410	1310	80	25	22.5	M6	18	2993	14.2
L1984.35D-1490	104	43	30.5	30.5	1490	1390	80	25	22.5	M6	19	2900	15.0
L1984.35D-1570	104	43	30.5	30.5	1570	1470	80	25	22.5	M6	20	2730	15.9
L1984.35D-1650	104	43	30.5	30.5	1650	1550	80	25	22.5	M6	21	2580	16.6
L1984.35D-1730	104	43	30.5	30.5	1730	1630	80	30.5	22.5	M6	22	2510	17.5

