



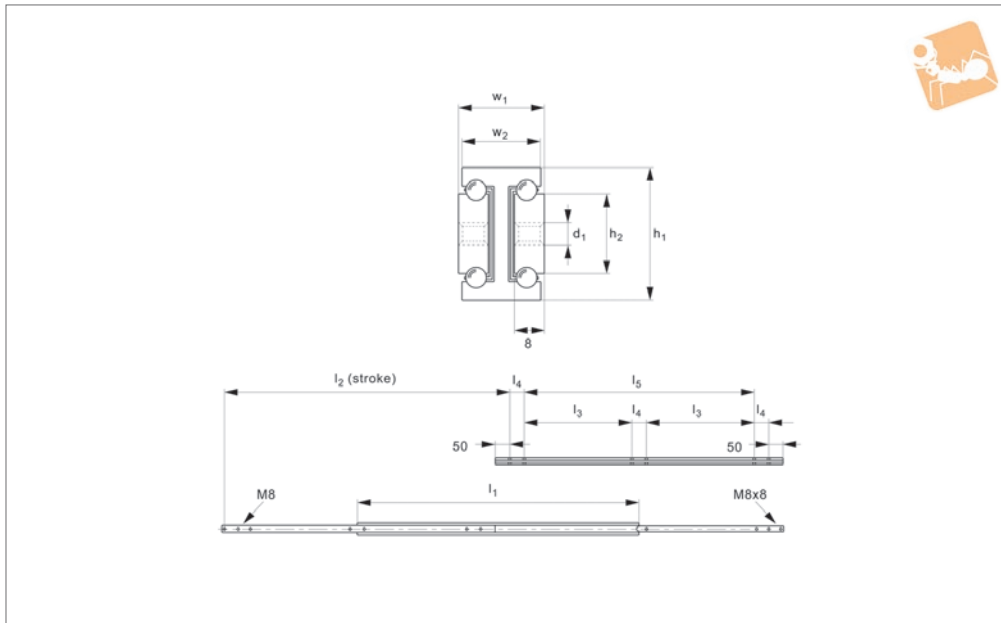

# Aluminium Telescopic Slides

fully telescopic, size 40

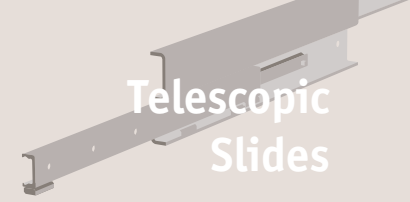

**L2041**

TELESCOPIC SLIDES

**Material**

High quality grade aluminium (EN-AW-6082 T6, anodised), with steel ball bearings and cage.

**Technical Notes**

Ideal for applications requiring lightweight

yet robust telescopic slides (eg. aircraft seating).

Total length: = Installation length ( $l_1$ ) + extension length ( $l_2$ ).

The maximum safe load is given for a fully extended pair of slides, mounted on the

major axis, with a load spread uniformly along the inner beam.

Order No.	$l_1$	$l_2$ stroke	$h_1$	$h_2$	$d_1$	$l_3$	$l_4$	$l_5$	$w_1$	$w_2$	Load/pair kg max.
L2041.0200	200	200	40	25	M8	-	-	50	24	22	70
L2041.0250	250	250	40	25	M8	-	50	50	24	22	75
L2041.0300	300	300	40	25	M8	-	100	50	24	22	80
L2041.0350	350	350	40	25	M8	-	150	50	24	22	85
L2041.0400	400	400	40	25	M8	-	200	50	24	22	90
L2041.0450	450	450	40	25	M8	-	250	50	24	22	95
L2041.0500	500	500	40	25	M8	-	300	50	24	22	100
L2041.0550	550	550	40	25	M8	150	-	50	24	22	105
L2041.0600	600	600	40	25	M8	175	-	50	24	22	110
L2041.0650	650	650	40	25	M8	200	-	50	24	22	105
L2041.0700	700	700	40	25	M8	225	-	50	24	22	100
L2041.0750	750	750	40	25	M8	250	-	50	24	22	95
L2041.0800	800	800	40	25	M8	275	-	50	24	22	90
L2041.0850	850	850	40	25	M8	300	-	50	24	22	85
L2041.0900	900	900	40	25	M8	325	-	50	24	22	80
L2041.0950	950	950	40	25	M8	350	-	50	24	22	75
L2041.1000	1000	1000	40	25	M8	375	-	50	24	22	70