




Captive Screws - Cheese Head

hex drive - 303 stainless - blackened

Captive Screws

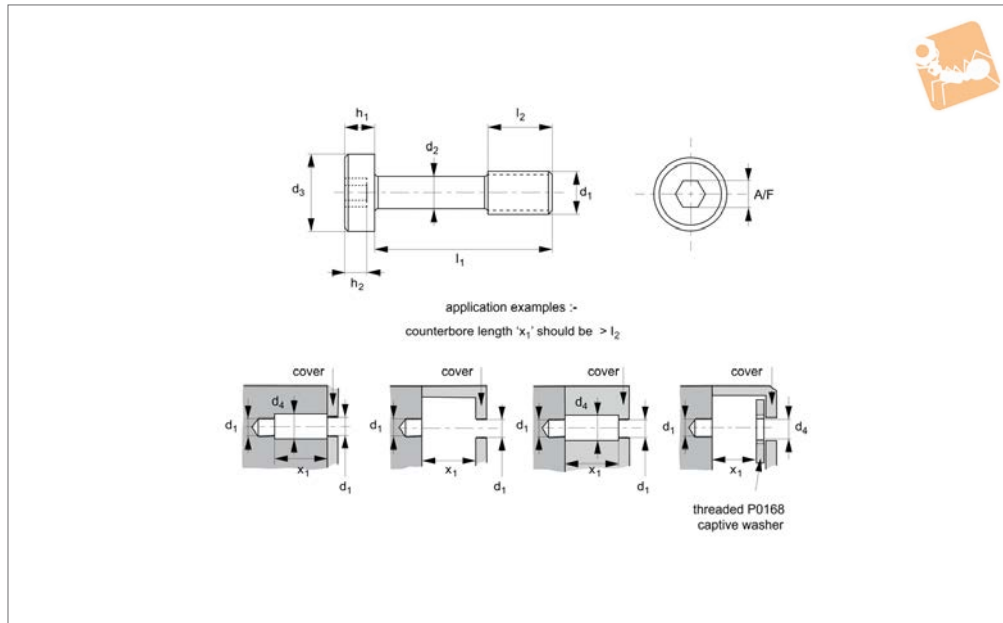

P0152.B2

CAPTIVE SCREWS

Material

Stainless steel (AISI 303, 1.4305), black oxide coated. Tensile strength 550 N/mm².

A marine grade stainless steel (AISI 316, 1.4401) version of this product is also available. Available on request in titanium, steel (anodised, black oxide or zinc plated), brass, aluminium etc.

Technical Notes

Used to comply with the Machinery Directive 2006/42/EC. Generally to ISO 1207. Often used with our captive washers (P0168) or retaining flanges (P0169 - for sheet metal applications). The use of our captive washers should be considered when fitted in panels with unthreaded holes.

Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d₁.

Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	l ₂ ±0.25	d ₃	d ₄ min.	h ₁	h ₂	A/F
P0152.020-010-B2	M 2	10	1.2	3.0	3.8	2.5	1.3	0.85	1.3
P0152.020-012-B2	M 2	12	1.2	3.0	3.8	2.5	1.3	0.85	1.3
P0152.020-016-B2	M 2	16	1.2	3.0	3.8	2.5	1.3	0.85	1.3
P0152.020-020-B2	M 2	20	1.2	3.0	3.8	2.5	1.3	0.85	1.3
P0152.025-008-B2	M 2,5	8	1.7	3.7	4.5	2.8	1.6	1.00	1.5
P0152.025-010-B2	M 2,5	10	1.7	3.7	4.5	2.8	1.6	1.00	1.5
P0152.025-016-B2	M 2,5	16	1.7	3.7	4.5	2.8	1.6	1.00	1.5
P0152.025-020-B2	M 2,5	20	1.7	3.7	4.5	2.8	1.6	1.00	1.5
P0152.025-025-B2	M 2,5	25	1.7	3.7	4.5	2.8	1.6	1.00	1.5
P0152.025-030-B2	M 2,5	30	1.7	3.7	4.5	2.8	1.6	1.00	1.5
P0152.030-010-B2	M 3	10	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-011-B2	M 3	11	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-013-B2	M 3	13	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-016-B2	M 3	16	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-018-B2	M 3	18	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-020-B2	M 3	20	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-025-B2	M 3	25	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-030-B2	M 3	30	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.030-040-B2	M 3	40	2.0	4.5	5.5	3.5	2.0	1.30	2
P0152.035-010-B2	M 3,5	10	2.3	5.2	6.0	3.8	2.4	1.4	2.5
P0152.035-016-B2	M 3,5	16	2.3	5.2	6.0	3.8	2.4	1.4	2.5
P0152.035-020-B2	M 3,5	20	2.3	5.2	6.0	3.8	2.4	1.4	2.5
P0152.035-025-B2	M 3,5	25	2.3	5.2	6.0	3.8	2.4	1.4	2.5
P0152.035-030-B2	M 3,5	30	2.3	5.2	6.0	3.8	2.4	1.4	2.5
P0152.035-040-B2	M 3,5	40	2.3	5.2	6.0	3.8	2.4	1.4	2.5
P0152.040-010-B2	M 4	10	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-012-B2	M 4	12	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-016-B2	M 4	16	2.8	6.0	7.0	4.5	2.6	1.6	2.5



CAPTIVE SCREWS

Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	l ₂ ±0.25	d ₃	d ₄ min.	h ₁	h ₂	A/F
P0152.040-018-B2	M 4	18	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-019-B2	M 4	19	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-020-B2	M 4	20	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-025-B2	M 4	25	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-030-B2	M 4	30	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-040-B2	M 4	40	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-050-B2	M 4	50	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.040-060-B2	M 4	60	2.8	6.0	7.0	4.5	2.6	1.6	2.5
P0152.050-010-B2	M 5	10	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-012-B2	M 5	12	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-016-B2	M 5	16	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-018-B2	M 5	18	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-020-B2	M 5	20	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-022-B2	M 5	22	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-025-B2	M 5	25	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-030-B2	M 5	30	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-040-B2	M 5	40	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-050-B2	M 5	50	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-060-B2	M 5	60	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.050-080-B2	M 5	80	3.7	7.5	8.5	5.5	3.3	2.0	3
P0152.060-016-B2	M 6	16	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-020-B2	M 6	20	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-025-B2	M 6	25	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-030-B2	M 6	30	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-040-B2	M 6	40	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-050-B2	M 6	50	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-060-B2	M 6	60	4.2	7.5	10.0	6.5	3.9	2.3	4
P0152.060-080-B2	M 6	80	4.2	7.5	10.0	6.5	3.9	2.3	4